



TERRAZZO

Terrazzo is a breathtaking collection of 30x60 & 60x60 rectified Glazed Porcelain Tiles, meticulously designed for both interior & exterior application.

Featuring a range of four exquisite colours – Charcoal, Cloud, Steel & Stone.

These tiles boast varying faces, adding depth & character to each installation.

In/Out Surface finish means you can blend seamlessly from indoor to outdoor living.

**Available in:**

- 30x60 IN/OUT surface wall/floor (Cloud & Stone only)
- 60x60 IN/OUT surface wall/floor (all colours)

Four luxe colours:

- Stone
- Cloud
- Steel
- Charcoal

Featuring:

With it's varied faces the Terrazzo Range offers a dynamic interplay of colours and patterns, allowing you to create unique and captivating spaces that reflect your personal taste.







60 X 60



30 X 60

Varying Faces

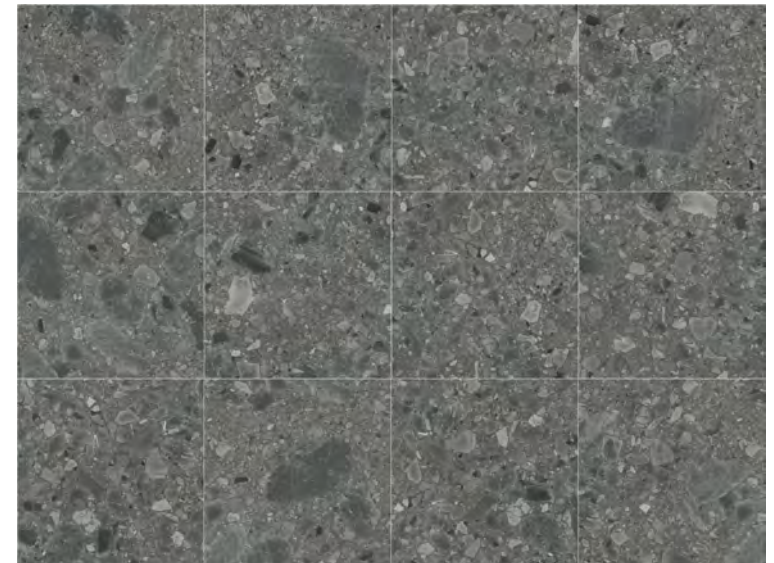

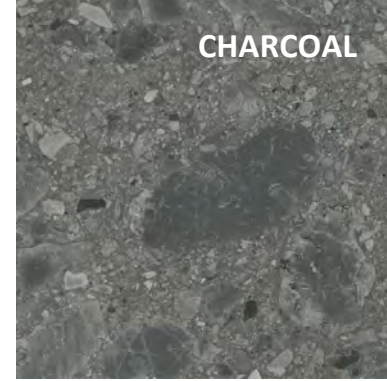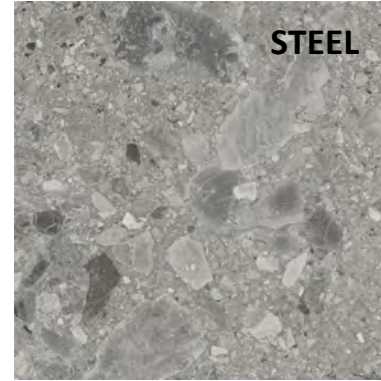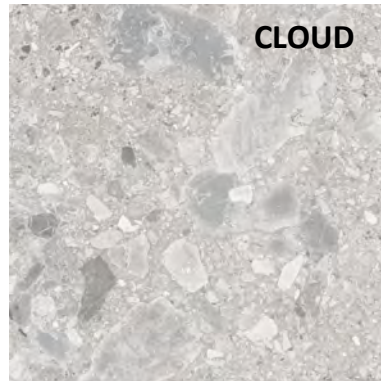



**The Terrazzo Series;
where luxury meets
durability in the world
of tiles.**



Technical Specifications: Terrazzo In/Out

Please note that this technical specification sheet is issued to you on an INDICATION ONLY basis as information is subject to shade/production variations, not necessarily to material you would be receiving.
No responsibility will be held for the item not meeting this result.
It is the responsibility of the end user to carry out appropriate testing for the tiles intended use.

Packing Information

Tile description		Quantity per Box		
Size (cm)	Texture	Pieces	Sqm	Weight (KGS)
30x60	In/Out	8	1.44	28.20
60x60	In/Out	4	1.44	31.65

	Properties	Test Method	Required Value		Value
	Water absorption	MS ISO 10545-3:2001	Eb≤0.5% Individual maximum 0.6%		0.17% 0.16%~0.19%
	Determination of Dimensions	MS ISO 10545-2:2002 Length and Width	N≥15cm	±0.6% ±2.00mm	0~+0.01% 0~+.01mm
		Thickness	N≥15cm	±5% ±0.5mm	+0.4%~+1.7% 0~+0.2mm
		Straightness of sides	N≥15cm	±0.5% ±1.5mm	-0.01%~+0.01% -0.1mm~+0.1mm
		Rectangularity	N≥15cm	±0.5% ±2.00mm	-0.06%~+0.08% -0.4mm~+0.5mm
	Breakage strength	MS ISO 10545-4:2003	≥1300		1899
	Modular of Rupture	MS ISO 10545-4:2003	Minimum 35		39.3
			Individual Minimum 32		37.2~41.1
	Chemical resistance	MS ISO 10545-13:2018 Resistance to household chemicals and swimming pool salts a) Household chemicals: Ammonium chloride, 100g/L b) Swimming pool salts: Sodium Hypochlorite solution, 20mg/L		Minimum GB	A
	Stain resistance	MS ISO 10545-14:2018 a) Green staining agent in light oil b) Red staining in light oil c) Iodine, 13g/L solution in alcohol d) Olive Oil		Minimum Class 3	Class 5
	Origin	CHINA			