



MALDIVES

Elevate your interiors with the elegant Maldives collection – a series of multifaced, rectified glazed porcelain tiles that blend natural aesthetics with modern durability.

Inspired by serene island textures, each tile offers subtle variation for a refined, sophisticated look.



Available in:

- 30x60 Matt Wall/Floor
- 60x60 Matt Wall/Floor
- 120x60 Matt Wall/Floor

Two Enticing Coastal Colours:

- Sand
- Shell

Featuring:


- Varying faces to give any room a contrasting & tasteful look.
- Rectified Glazed Porcelain

60x60


30x60

120x60

Maldives Sand 60x60

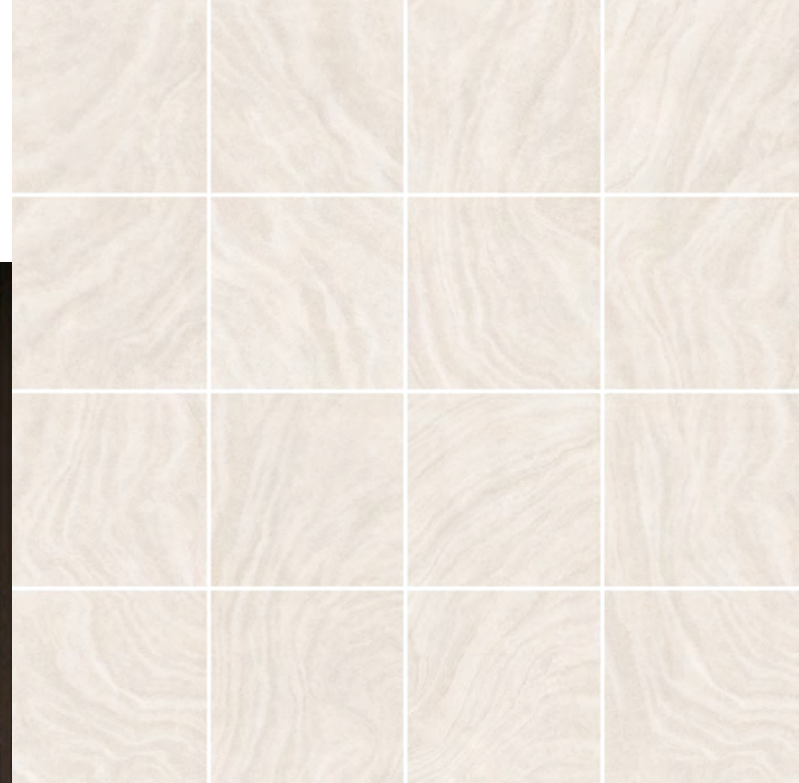

16 VARYING FACES

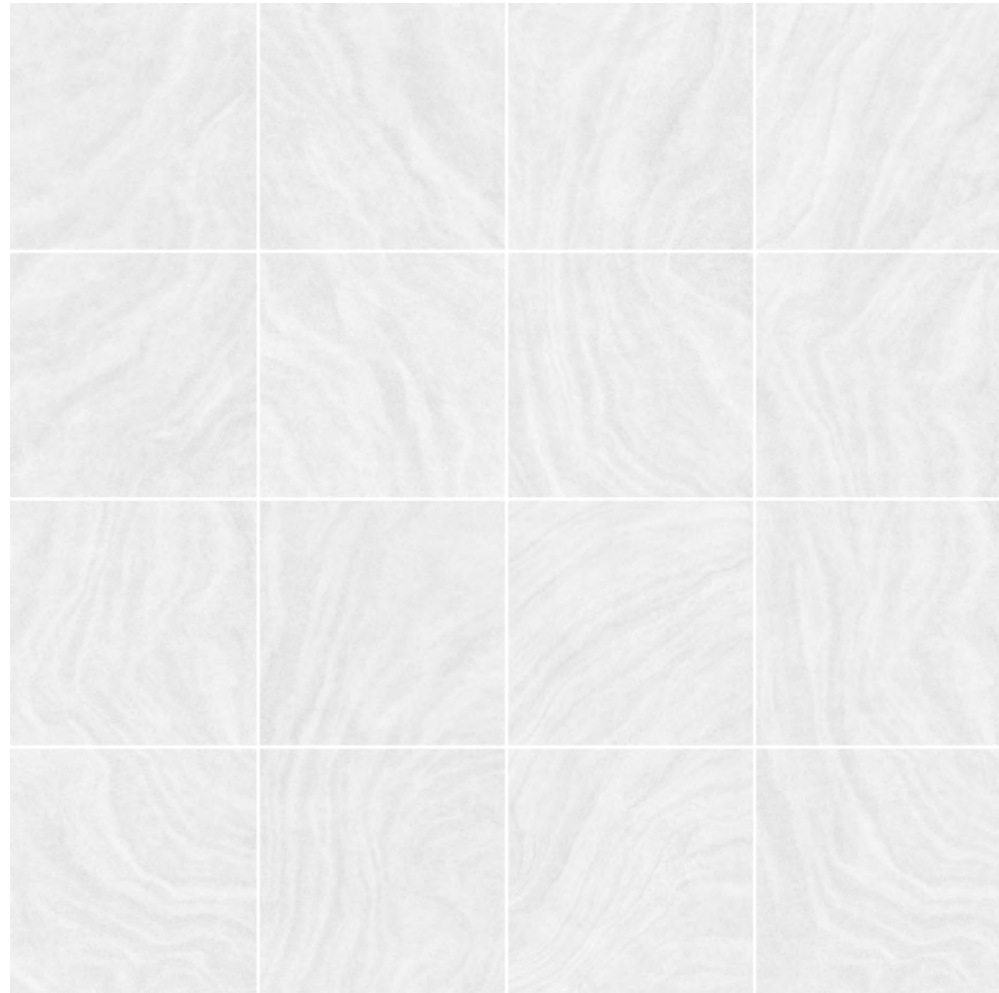

16 VARYING FACES

Maldives Shell 60x60





8 VARYING FACES

Maldives Sand 60x120



Maldives Shell 60x120



8 VARYING FACES





32 VARYING FACES

Maldives Shell 30x60









32 VARYING FACES

Maldives Sand 30x60









Technical Specifications: Maldives 60x120

	Properties	Test Method	Required Value	Value
	Water absorption	GB/T 3810.3-2016	E≤0.5% Individual Maximum 0.6%	0.05% 0.04% ~ 0.06%
	Determination of dimensions	GB/T 3810.2-2016	Length ±0.6% ±2.0mm	-0.04%~-0.03% -0.5mm~-0.4mm
			Width ±0.6% ±2.0mm	0 ~ +.03% 0 ~ +0.2mm
			Thickness ±5% ±0.5mm	-0.8%~+0.7% -0.1mm~+0.1mm
	Modulus of rupture	GB/T 3810.4-2016	Minimum 35 Individual minimum 32	41.0 38.3~43.2
	Chemical resistance	GB/T 3810.13-2016	Minimum GB	GA
	Stain resistance	GB/T 3810.14-2016	Minimum Class 3	Class 5
	Origin	CHINA		

Packing Information

Tile description		Quantity per Box		
Size (cm)	Texture	Pieces	Sqm	Weight (kgs)
20x120	Matt	2	1.44	34.60
60X60	Matt	4	1.44	31.20
30X60	Matt	8	1.44	31.20

Technical Specifications: Maldives 60x60

	Properties	Test Method	Required Value	Value
	Water absorption	GB/T 3810.3-2016	E≤0.5% Individual Maximum 0.6%	0.08% 0.07% ~ 0.09%
	Determination of dimensions	GB/T 3810.2-2016	Lengt h & Width ±0.6% ±2.0mm	-0.02%~-0.04% -0.1mm~-0.3mm
			Thicknes s ±5% ±0.5mm	-0.8%~+1.3% -0.1mm~+0.1mm
	Modulus of rupture	GB/T 3810.4-2016	Minimum 35 Individual minimum 32	45.4 43.3~48.2
	Chemical resistance	GB/T 3810.13-2016	Minimum GB	GA
	Stain resistance	GB/T 3810.14-2016	Minimum Class 3	Class 5
	Origin	CHINA		

Please note that this technical specification sheet is issued to you on an INDICATION ONLY basis as information is subject to shade/production variations, not necessarily to material you would be receiving. No responsibility will be held for the item not meeting this result. It is the responsibility of the end user to carry out appropriate testing for the tiles intended use.